


K25D (K) H系列滑柱式换向阀 (二位五通)



符号

K25DH-

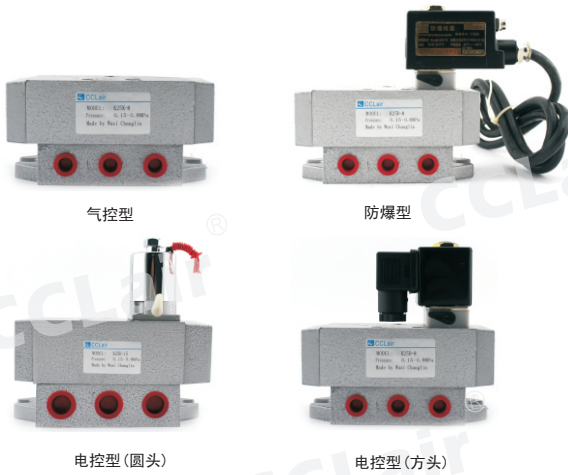

K25KH-



订购码


K25	DH	—	8	M	GB	Q
系列代码	动作方式	接管口径	公制	防爆	圆头	
K 系列二位五通滑柱式气控换向阀	DH:单电控 KH:单气控	6 (G1/8") 8 (G1/4") 10 (G3/8") 15 (G1/2") 20 (G3/4") 25 (G1") 32 (G1 1/4") 40 (G1 1/2") 50 (G2")	M10x1 M12x1.25 M16x1.5 M20x1.5 M27x2 M33x2 M42x2 M48x2 M60x2	GB:防爆 空白:普通	Q:圆头 空白:方头	

技术参数

型号	K25DH-6 K25KH-6	K25DH-8 K25KH-8	K25DH-10 K25KH-10	K25DH-15 K25KH-15	K25DH-20 K25KH-20	K25DH-25 K25KH-25
公称通径 mm	6	8	10	15	20	25
工作压力 Mpa	0.15~0.8					
泄漏量 Nul/min	≤10		≤25		≤50	
换向时间 ms	≤0.04		≤0.06		≤0.1	
切换频率 Hz	≥10		≥8		≥5	
工作温度 °C	-10~55					
工作介质	经净化、含有润滑油的压缩空气					
介质温度 °C	-5~50					
S 值 mm²	10	20	40	60	120	190
电压 v	AC:220,110,36; DC:24、12(电压波动允许为额定电压的+10%~-15%)气控:无本项参数					
寿命万次	≥150					

外形尺寸

K25DH-□

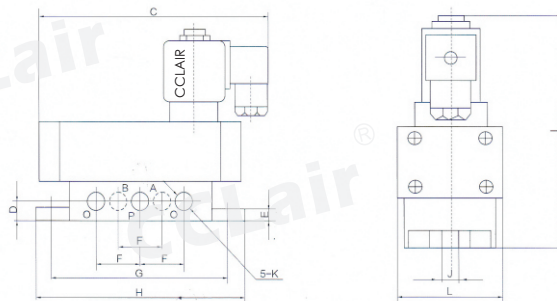

型号	接管螺纹 K	C	D	E	F	G	H	I	J	L
K25DH-6 K25KH-6	6:G1/8(M10*1)	145	14	10	28	112	130	130	9	56
K25DH-8 K25KH-8	8:G1/4(M12*1.25)									
K25DH-10 K25KH-10	10:G3/8(M16*1.5)	163	19	14	38	146	164	165	9	74
K25DH-15 K25KH-15	15:G1/2(M20*1.5)									
K25DH-20 K25KH-20	20:G3/4(M27*2)	241	25	15	60	202	234	210	11	112
K25DH-25 K25KH-25	25:G1(M33*2)									
K25DH-32 K25KH-32	32:G1 1/4(M42*2)	360	46	18	96	303	340	260	13	166
K25DH-40 K25KH-40	40:G1 1/2(M48*2)									
K25DH-50 K25KH-50	50:G2(M60*2)									