

2WC系列膜片式常开型电磁阀



概述

先导式膜片式通断电型
 阀体为黄铜或不锈钢
 工作压力：0.1~0.8MPA
 额定电压：AC110V/220V/DC24V(50/60HZ)
 电压允许差：±10%
 品牌：CCLAIR

订购码


2WC - 15 - S - N - GB - AC220V

二方口直动式常开型 | 接管口径 | 空白: 黄铜 S: 不锈钢 | N=NBR: 丁腈橡胶(可省) V=VITON: 氟胶 E=EPDM: 三元乙丙橡胶 | GB: 隔爆 空白: 普通 | 使用电压 见下表

技术参数

型号	2WC-06K	2WC-08K	2WC-10K	2WC-10K	2WC-15K	2WC-20K	2WC-25K	2WC-32K	2WC-40K	2WC-50K
接管口径	1/8"	1/4"	3/8"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
流量通径	2.5mm 4mm		4mm	16mm	16mm	20mm	25mm	32mm	40mm	50mm
使用流体	空气、水、油、中性气体液体				电压	AC110/220V/DC24V(50/60HZ)				
动作方式	先导式				形式	常开型				
阀体材质	黄铜或不锈钢				压力	水液、空气：0.1~0.8MPA				
密封材质	标准：NBR 80℃以下流体温度 可配：EPDM 120℃以下温度 VITON 耐弱酸弱碱或 150℃以下温度									

外形尺寸

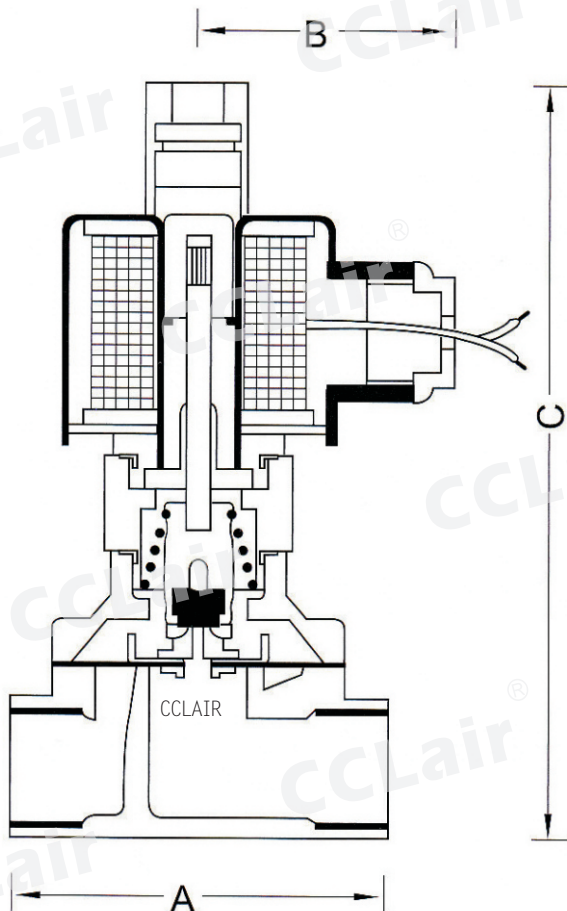

型号	A	B	C	接管口径
2WC-6K	40	42	79	G1/8"
2WC-8K	40	42	79	G1/4"
2WC-10K	51	55	105	G3/8"
2WC-10K	62	55	123	G3/8"
2WC-15K	62	55	123	G1/2"
2WC-20K	67	55	134	G3/4"
2WC-25K	86	73	138	G1"
2WC-32K	90	77	151	G1 1/4"
2WC-40K	106	87	170	G1 1/2"
2WC-50K	123	93	182	G2"
2WC-10SK	69	57	140	G3/8"
2WC-15SK	69	57	140	G1/2"
2WC-20SK	73	57	145	G3/4"
2WC-25SK	98	77	155	G1"
2WC-32SK	115	87	161	G1 1/4"
2WC-40SK	121	94	170	G1 1/2"
2WC-50SK	168	123	195	G2"
2WC-15SFK	107	95	170	DN15
2WC-20SFK	107	102	170	DN20
2WC-25SFK	138	108	185	DN25
2WC-32SFK	149	131	220	DN32
2WC-40SFK	160	141	240	DN40
2WC-50SFK	186	160	260	DN50