


K23JD(K)系列截止阀(联合设计型)

符号



订购码


K23J	D	F	8	M	T	GB	Q
系列代码	控制方式	连接方式	接管口径	公制	原始状态	防爆	圆头
<p>K系列二位三通截止式气控换向阀 D:单电控 F:法兰式 6:G1/8" M10*1 空白:常闭 GB:防爆 Q:圆头 空白:板接式 K:单气控 8:G1/4" M12*1.25 T:常通 空白:普通 空白:方头 10:G3/8" M16*1.5 15:G1/2" M20*1.5 20:G3/4" M27*2 25:G1" M33*2 32:G1 1/4" M42*2 40:G1 1/2" M48*2 50:G2" M60*2</p>							



技术参数

型号	K23JD-6(T)	K23JD-8(T)	K23JD-10(T)	K23JD-15(T)	K23JD-20(T)	K23JD-25(T)	K23JD-F32(T)	K23JD-F40(T)	K23JD-F50(T)
公称通径 mm	6	8	10	15	20	25	32	40	50
工作压力范围 MPa	0.15 ~ 0.8								
泄漏量 Nml/min	≤10	≤10	≤25	≤25	≤50	≤50	≤70	≤70	≤70
换向时间 S	≤0.04	≤0.04	≤0.06	≤0.06	≤0.1	≤0.1	≤0.15	≤0.15	≤0.2
切换频率 Hz	≥10	≥10	≥8	≥8	≥4	≥4	≥3	≥3	≥2
工作温度 °C	-10 ~ 55								
介质温度 °C	-5 ~ 50								
S 值 mm²	≥10	≥20	≥40	≥60	≥120	≥190	≥300	≥400	≥500
电压 V	AC: 220, 110, 36; DC: 24, 12(电压波动允许为额定电压的+10% ~ -15%) 气控: 无本项参数								
寿命万次	≥150								

外形尺寸

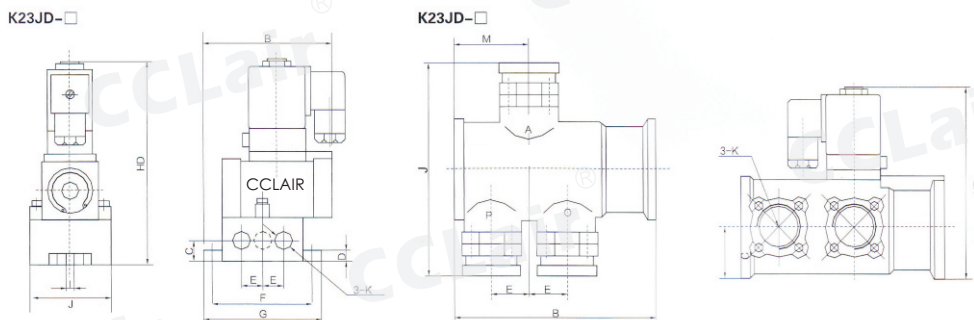

型号	接管螺纹 K	B	C	D	E	F	G	HD	HQ	I	J	M	L	
K23JD-6(T), K23JK-6(T)	G1/8(M10×1)	90	14	7	14	68	80	134	91	7	56	~	G1/8	
K23JD-8(T), K23JK-8(T)	G1/4(M12×1.25)	125	19	10	19	86	100	155	111	7	64	~		
K23JD-10(T), K23JK-10(T)	G3/8(M16×1.5)	180	30	12	30	130	162	218	149	11	100	~		
K23JD-15(T), K23JK-15(T)	G1/2(M20×1.5)	215	52.5	~	40	~	~	197	130.5	~	218	80		
K23JD-20(T), K23JK-20(T)	G3/4(M27×2)	265	56	~	45	~	~	222	155	~	258	101		
K23JD-25(T), K23JK-25(T)	G1(M33×2)													
K23JD-F32(T), K23JK-F32(T)	G1/4(M42×2)													
K23JD-F40(T), K23JK-F40(T)	G1/2(M48×2)													
K23JD-F50(T), K23JK-F50(T)	G2(M60×2)													